

KERSPLASH® Pool Climbing Walls

SPECIFICATIONS & MEASUREMENTS

PANEL STYLE	NUMBER OF PANELS	HEIGHT (A)	WIDTH (B)	CLIMBABLE SURFACE (C)	RECOMMENDED WATER DEPTH*
Crystal Clear	2	10 ft	4 ft	8 ft	5 ft
Translucent Blue	2	10 ft	4 ft	8 ft	5 ft
Translucent Green	2	10 ft	4 ft	8 ft	5 ft
Alternating B/G	2	10 ft	4 ft	8 ft	5 ft
Crystal Clear	3	14 ft	4 ft	12 ft	6 ft
Crystal Clear	3 + removable	14 ft	4 ft	12 ft	6 ft
Translucent Blue	3	14 ft	4 ft	12 ft	6 ft
Translucent Green	3	14 ft	4 ft	12 ft	6 ft
Alternating B/G	3	14 ft	4 ft	12 ft	6 ft
Crystal Clear	4	18 ft	4 ft	16 ft	9 ft
Translucent Blue	4	18 ft	4 ft	16 ft	9 ft
Translucent Green	4	18 ft	4 ft	16 ft	9 ft
Alternating B/G	4	18 ft	4 ft	16 ft	9 ft

* Manufacturer's recommendations. Please check your state and local code to ensure your configuration complies.


KERSPLASH® requires a foot print of:

- 1 35" of deckspace
- 1 4' of clearance behind the wall for a walkway 1 5' to either side of the wall


- 1 10' drop zone
- Pool depth determines the height of the wall

Note: Dimensions vary with specific applications. Specifications are nominal and are subject to change. Please contact Spectrum Aquatics for custom applications.


A designated "drop zone" is recommended at the base of Kersplash to keep swimmers out of this area.

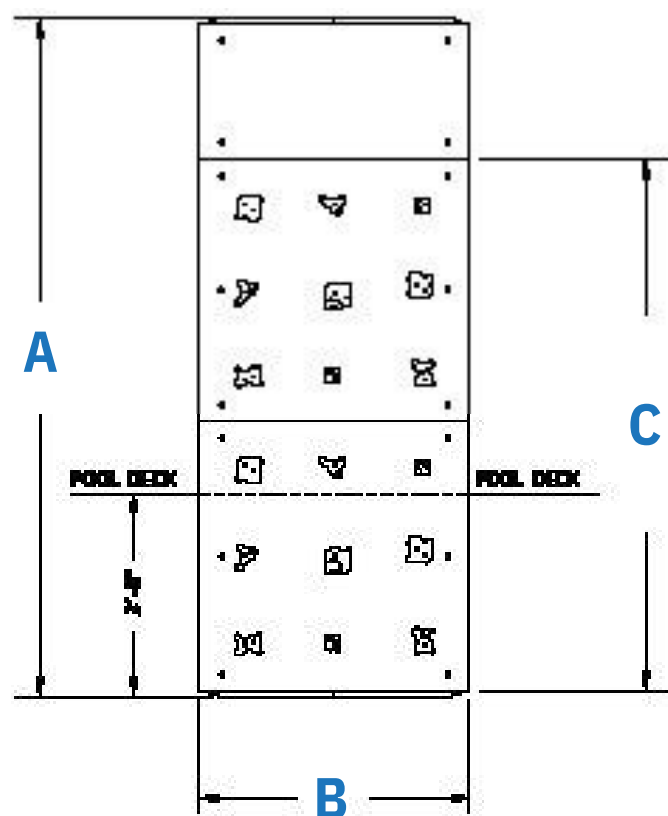

8 FT HIGH WALL

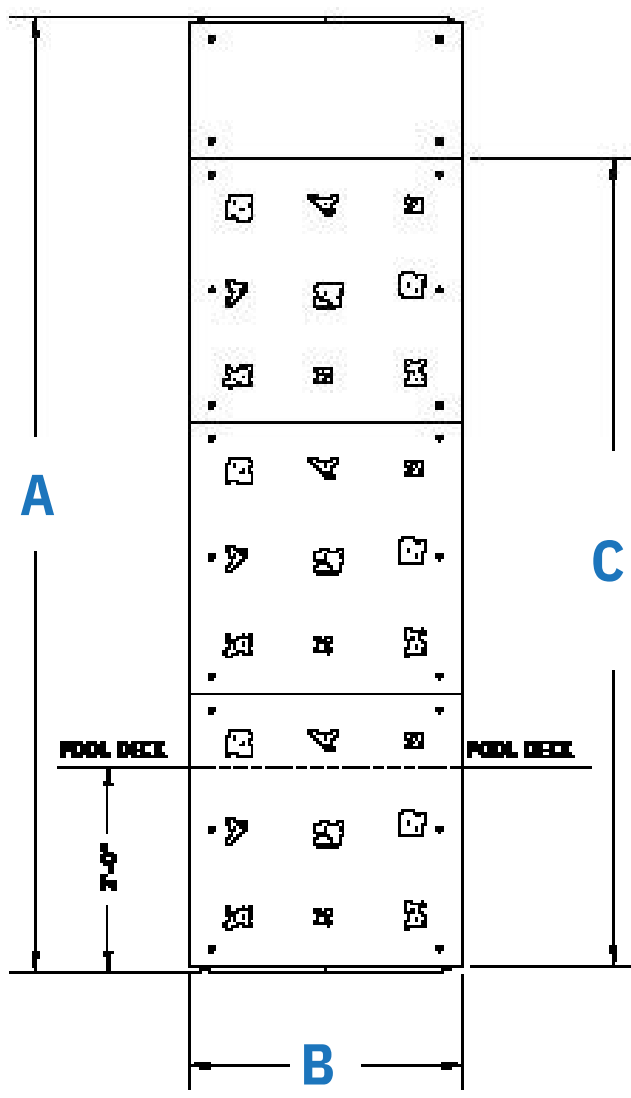

12 FT HIGH WALL

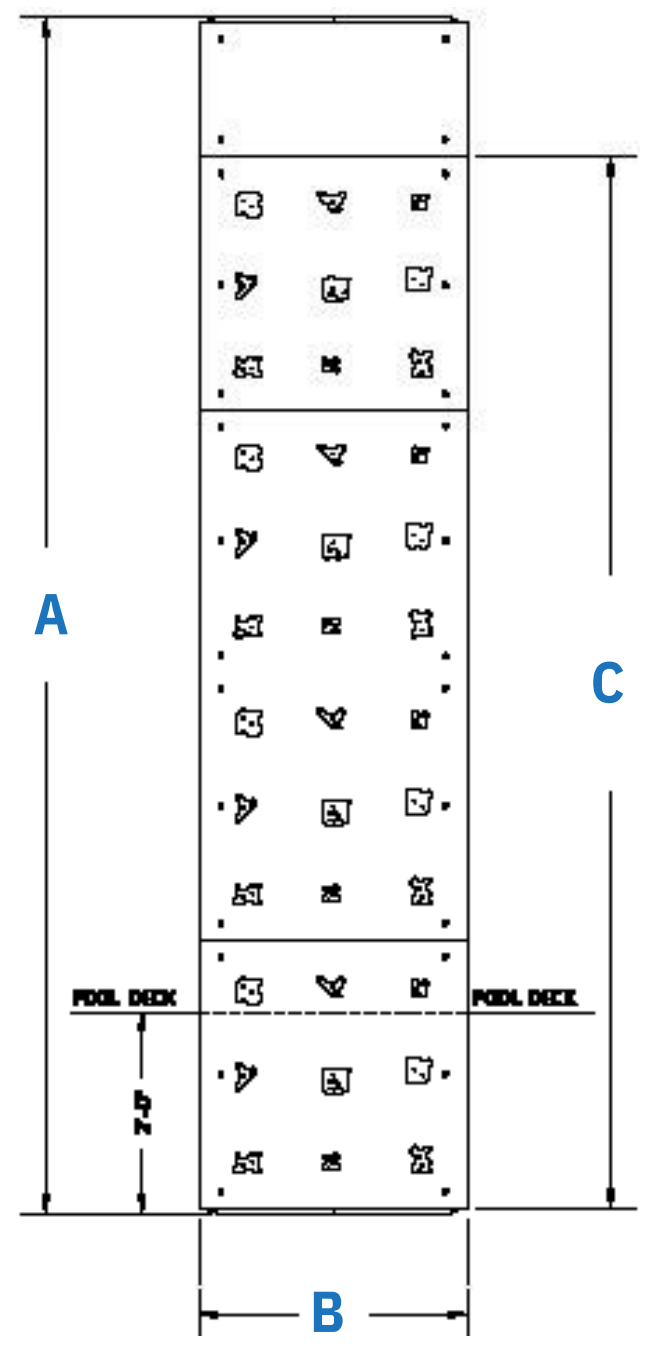

16 FT HIGH WALL



7100 Spectrum Lane | Missoula MT 59808

800.476.7366 | INFO@SPECTRUMPRODUCTS.COM

WWW.SPECTRUMPRODUCTS.COM